

## Specifications


- Steel Construction, Zinc Plated
- Buna-N "O"-Ring
- Air Flows to 64 cfm / 480 gpm

## Options

- Available with 3/4" or 1-1/4" Male NPT attachment
- Available with 1" - 12", 1-1/2" - 16" Element attachment Thread to fit SF6500 & SF6700 Series Element



## Dimensions

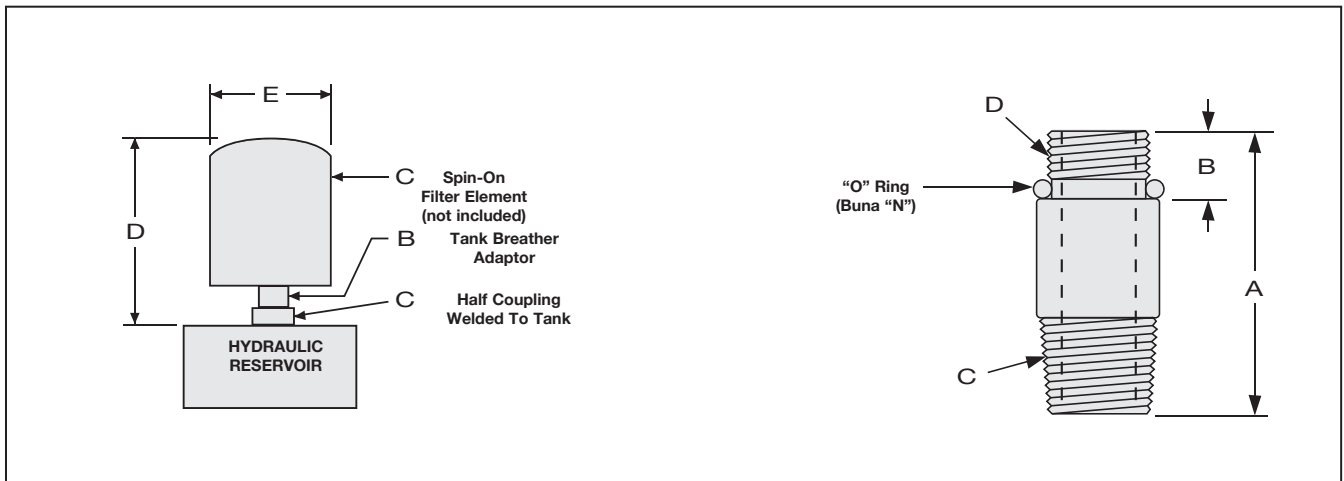

Filler Breather Adaptor	A		B		C Male Pipe Thread	D Element Attached Thread	Element Options	Micron Rating	Air Flow cfm/gpm
	mm	in	mm	in					
<b>TBA-075</b>	57.15	<b>2.25</b>	12.7	<b>0.5</b>	3/4" NPT	1" - 12 UNF	SF 6520/21 SF 6549	10µ 3µ	73/172 20/47
<b>TBA-120</b>	7.62	<b>3</b>	12.7	<b>0.5</b>	1 1/4" NPT	1 1/4" BSP	SGB-120 SFC-5710E SFC-5810E	3µ 10µ 10µ	55/395 166/440 166/440
<b>TBA-125</b>	76.2	<b>3</b>	12.7	<b>0.5</b>	1 1/4" NPT	1 1/2" - 16 UNF	SF 6720/21 SF 6703/04	10µ 3µ	159/440 135/262

## Ordering Information

		<b>TBA</b>			<b>075</b>		
<b>Product</b>						<b>Size (Pipethread Adaptor / Element Port)</b>	
<b>TBA</b>	Filler Breather Adaptor					<b>075</b>	3/4" NPT / 1"-12 UNF
						<b>120</b>	1 1/4" NPT / 1 1/4" BSP
						<b>125</b>	1 1/4" NPT / 1 1/2"-16 UNF