


## Specifications


- SAE O-Ring Threads for Leak-Free Installation
- Buna O-Ring Standard
- 100 Mesh (125 Micron) Stainless Wire Screen
- Flow Rates to 40 gpm
- Temperature to 212°F (100°C)

## Options

- 5 PSI Bypass
- Weld Flange Available (WC Series - Page A7)
- Consult Factory for Special Screens and Threads

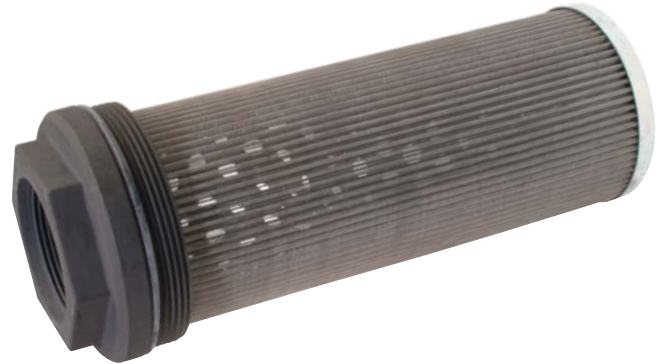

## Dimensions

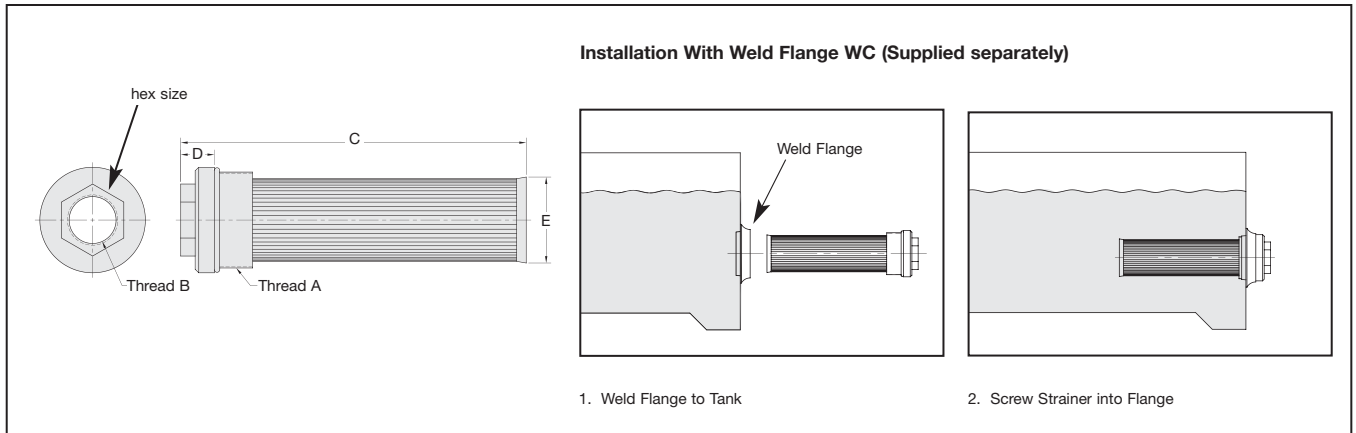

## Ordering Information

Part No. Non-Bypass	Part No. Bypass	Thread (Per SAE J514)		C		D		E		Hex Size		Flow		Area	
		A	B	mm	in	mm	in	mm	in	mm	in	lpm	gpm	cm <sup>2</sup>	sq. in
TMF-1625-0-0	TMF-1625-0-5	2 1/2"-12	1 5/16"-12	229	9.0	19	0.75	58	2.3	54	2.1	34	9	580	90
TMF-2025-0-0	TMF-2025-0-5	2 1/2"-12	1 3/8"-12	229	9.0	19	0.75	58	2.3	54	2.1	53	14	580	90
TMF-1834-0-0	TMF-1834-0-5	3 3/8"-12	1 7/8"-12	224	8.8	23	0.9	80	3.1	64	2.5	80	21	1484	230
TMF-2534-0-0	TMF-2534-0-5	3 3/8"-12	2 1/2"-12	236	9.3	25	1.0	80	3.1	76	3.0	148	39	1484	230