

Pneumatic Actuator Packages

Most Stauff valves can be factory mounted to compact, efficient pneumatic actuators. The actuators feature simple, robust construction and are suitable for applications with high cycle requirements. The double piston design significantly reduces the overall size of the valve/actuator package.

Solenoid valves and limit switches are available.

Note: Actuators are designed for 90 degree open/close applications only, they should not be used for valve throttling.

Electric Valve Actuator Packages can also be offered for different valve styles and sizes.

Contact Stauff with requirements.



Limit Switches

Most Stauff valves can be ordered with one or two limit switches to indicate whether the valve is in the open or closed position.


Contact Stauff with requirements.





Actuator Selection Chart - Single Acting Pneumatic Actuator

For Two-Way Ball Valves with Normal Hydraulic Fluid:
 (minimum air supply pressure is 80 PSI)

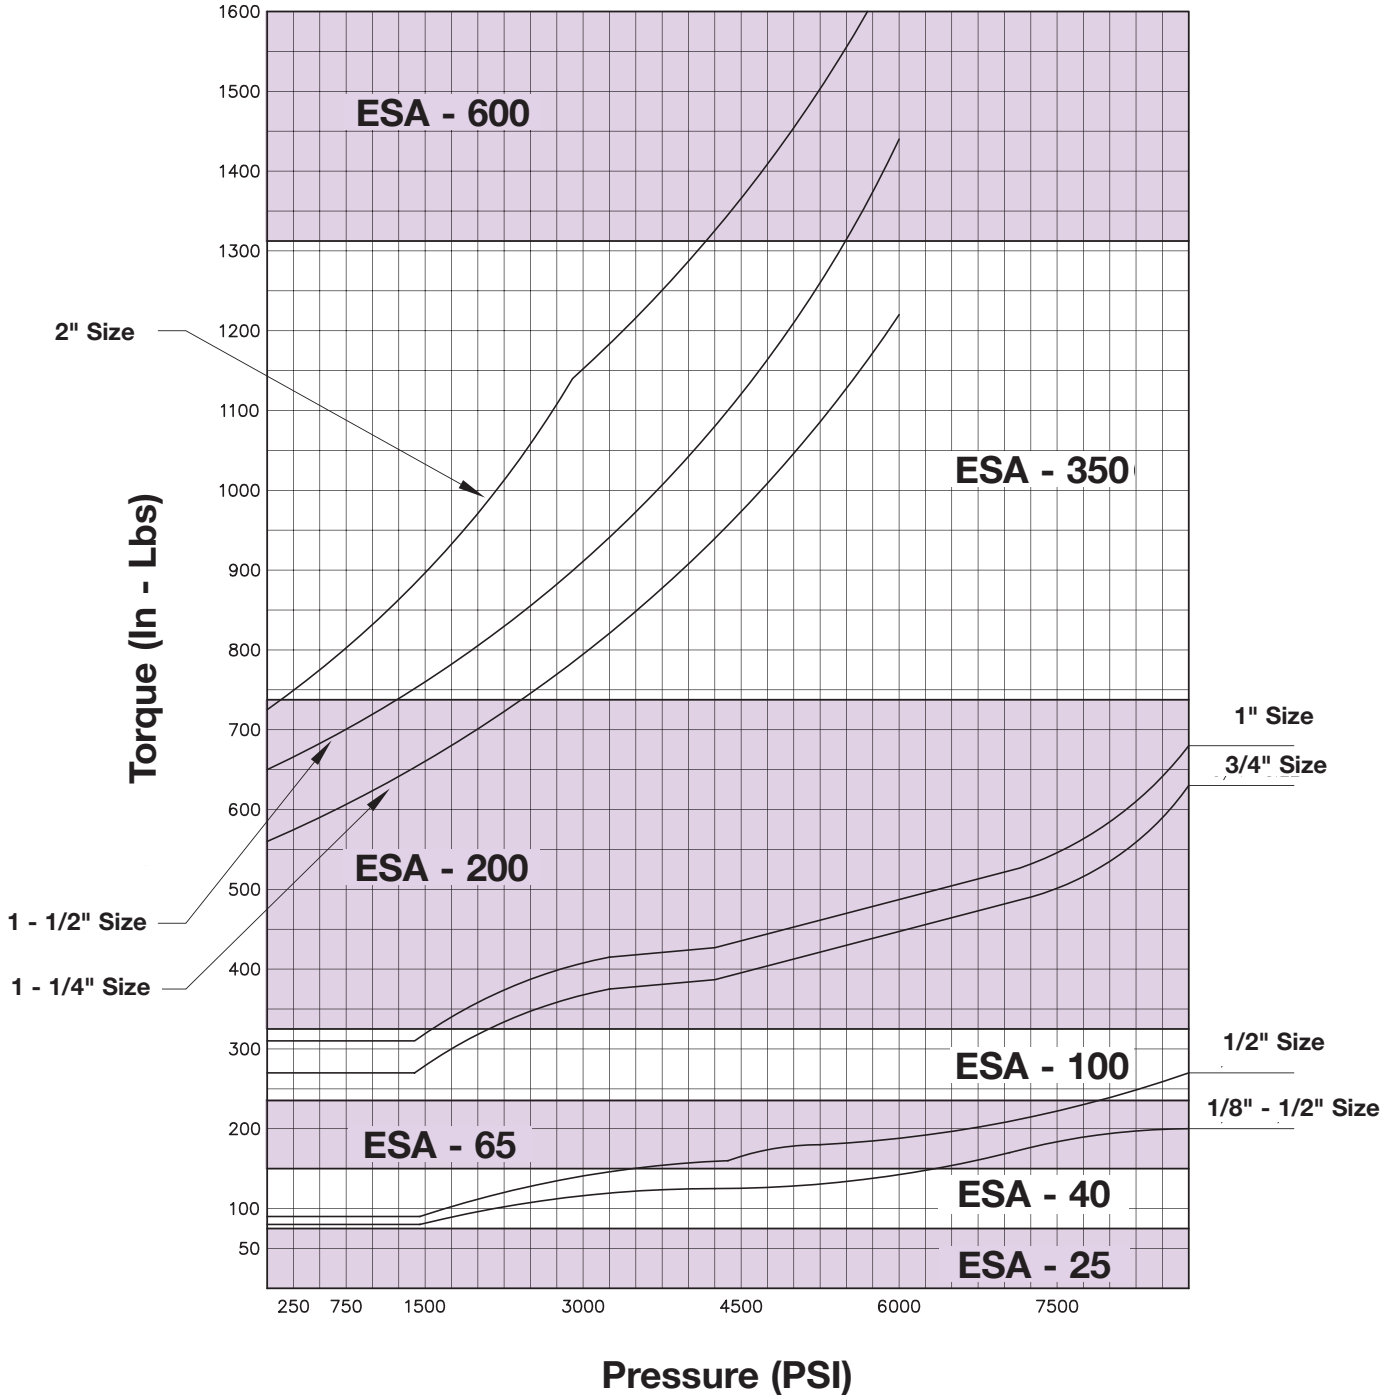

For Two-Way Ball Valves with Normal Hydraulic Fluid:
 (minimum air supply pressure is 80 PSI)

